




SPECIFICATION

Model	HT-C-40-12
Output current	40A(12V)
Charging Type	3 stage
Bulk Stage	14.5V(±0.5V), 40A
Absorption Stage	14.5V(±0.5V), 40A~4A
Float Stage	13.6V@min. 0.5A (Depends on battery status)
AC input voltage	115V(90V~135V) / 230V(180V~270V)
Frequency	50 / 60Hz
charger efficiency	85%
Recommended Battery Type and size	lead-acid, 250Ah and up
Remote Control	Yes
Over Load Protection	Yes
Over temp. Protection	Yes
Output Reverse Protection	fuse blow
Operating temp	0°C~30°C
storage temp	-25°C~70°C
Battery connection	1 pos. terminal, 1 neg. terminal
Dimension (L.W.H)/mm	380 x 179 x 82
Net Weight (kg)	4.5
AC Input cable	Yes

Battery Charging (3 stage charging profile)

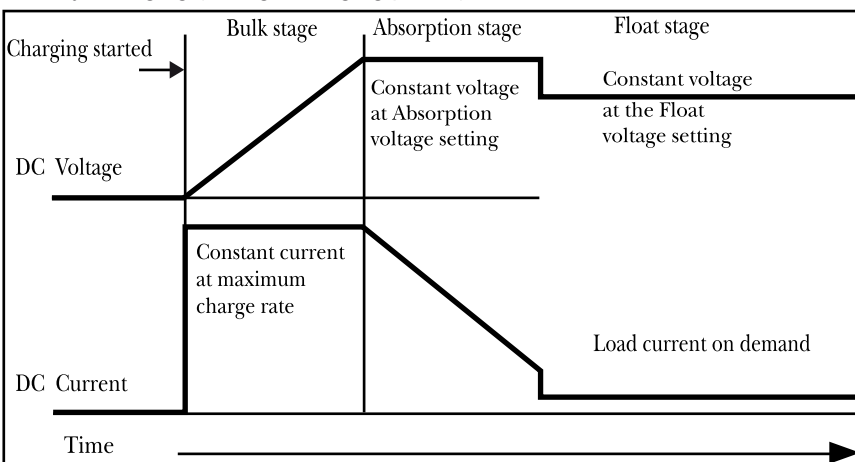

1. Switched Mode Design.
2. Fixed voltage Mode (power supply) Function.
3. Remote Control Panel Display.
4. Wide voltage range operation. (90-135 VAC, 180-270 VAC, 50/60Hz)
5. Durable and corrosion resistant chassis.
6. Over-temperature shutdown and overload protection.
7. Transformer isolated for safety.
8. Reverse polarity protection.
9. Short-circuit and surge protection.



caravan&leisure
technology

our technology,your leisure

www.caravantechology.com

TEL:08452-262675

Made in Taiwan